### CITY OF ELK GROVE SMUD SERVICES REQUEST FOR TELECOMMUNICATOINS SERVICE PROVIDER



Approximate Date Service Connection is Needed:

START DISCONNECT TRANSFER OF SERVICE

Telecommunications Service Provider (TSP) Name: Verizon Wireless

TSP Billing Address: PO BOX 21074, Tulsa, OK 74121

Contact Person and Number: DeeAnn Jurach (916) 612-3789

Point of Connection (POC): City Service# (XXXX)

**SMUD POC** to City Conductor:

Date of Request: 06/19/2020

1. Descriptive Address: Measurements must be from the street center line and must be listed as x feet, the side of the street, and include north/south and east/west directions. For example: 50 feet of East Street and 10 feet South of J Street.

#### 218' North & 94' East of Franklin Blvd & Big Horn Blvd

2. California State, Zone 2, NAD83 in Feet: X,Y coordinate of the connection point:

**NAD83:** 38.434725, -121.445854

**CA State, Zone 2**: 6720399.766ftUSE 1920623.225ftUSN

3. Attach City Map with SMUD POC to City Conductor with an X or highlight on the map. (Note: please only submit the drawing with this location. Do not submit all drawing pages.) **See attached map.** 

City Pole Number: SLT# 020748

Location of TSP Devices on City Street lights:

1. Descriptive Address: Measurements must be from the street center line and must be listed as x feet, the side of the street, and include north/south and east/west directions. For example: 50 feet of East Street and 10 feet South of J Street.

#### 302' North & 52' East of Franklin Blvd & Big Horn Blvd

2. California State, Zone 2, NAD83 in Feet: X,Y coordinate of the connection point:

**NAD83:** 38.434979, -121.4459

**CA State, Zone 2:** 6720386.025ftUSE 1920715.644ftUSN

3. Attach City Map with location of TSP devices on City Street light with an X or highlight on the map. (Note: please only submit the drawing with this location. Do not submit all drawing pages.) **See attached map.** 

Point of Service (CITY POS): SMUD POS: #0352

- 1. Descriptive Address: Measurements must be from the street center line and must be listed as x feet, the side of the street, and include north/south and east/west directions. For example: 50 feet of East Street and 10 feet South of J Street.
  - 218' North & 94' East of Franklin Blvd & Big Horn Blvd
- 2. California State, Zone 2, NAD83 in Feet: X,Y coordinate of the connection point:

NAD83: 38.434979. -121.4459

CA State, Zone 2: 6720386.025ftUSE 1920715.644ftUSN

3. Attach City Map with SMUD POC to City Conductor with an X or highlight on the map. (Note: please only submit the drawing with this location. Do not submit all drawing pages.) **See attached map.** 

Number/Type of Devices: (How many transmitters, antennae, etc.) 3

Make and Model of Devices: Samsung AT1K0I 5G NR AU

Maximum Wattage of each Device: 416

Small cell attachment equipment specification sheet attached \_\_X\_\_\_ Note:

This area reserved for SMUD use

## **ATTACHMENTS (IN THIS ORDER)**

1. LOCATION MAP: GOOGLE MAP SHOWING: (Do not change orientation of the map)

a. POC (Source that feeds the service pedestal)

b. POS (City service pedestal)

2. PE CERTIFICATION: Signed and with seal from Electrical Engineer

3. FIELD VERIFICATION: Small Cell Load Summary sheet(s)

4. EQUIPMENT SPECS: Specific to each SMUD Service Notice Request





June 18, 2020

Carrier: Verizon Wireless

2785 Mitchell Drive, Suite 9 Walnut Creek, CA 94598

To Whom It May Concern,

I, Manan Christian PE state that Samsung Distributed 5G Radio/Antenna Unit model #AT1K01 is designed to use a maximum of 416 watts per unit at 120 volts and that the electrical power load presented in this document meets the requirements of the California Electrical Code 2019, NEC 2017 and National electrical safety code 2017.

Scenario 1: Three distributed DU-RU Radio/Antenna Units

Unit	W
Distributed DU-RU	416
Distributed DU-RU	416
Distributed DU-RU	416
Total	1248

Scenario 2: Three distributed DU-RU Radio/Antenna Units

Unit	W
Distributed DU-RU	416
Distributed DU-RU	416
Total	832

Sincerely,



Manan H Christian, P.E. – E.E. California License: E22864 Expiration Date: 12/31/2020

### FIELD WALK DATA COLLECTION FORM



Vendor/Carrier Name:	VERIZON WIRELESS
City Project Number:	
Site Walk Date & Time:	4/10/2020
Electrical Plan Sheet Number:	N/A

Project/Site ID:	CA_ELK GROVE_LAGUNA_012							
Installation Address:	8783 Franklin Blvd.							
Installation Coordinates:	38.434979, -121.4459							
Node Number:	LAGUNA_012							
Street Light Pole ID:	020748							
City Service Address:	5100 Beechurst Ct							
City Service Number:	0352							
SMUD Point of Connection Address:	5100 Beeshurst Ct.							
SMUD Point of Connection Coordinat	ates: 38.434788, -121.445914							
RF Configuration:	3		Radio Loa	d: 416	5 Fu	ture Radio	Load:	1248
							•	
Circuit Breaker:	#3 5.2 amps existing load							
Voltage:								
Number of Existing Loads:	SL-LEC	): 6	SL-HPS:	·	LP-LED:		LP-HPS	
Other Existing Loads:								·

	Street Light Poles Requiring Photocell Retrofit		
Street Light		Pole Type	Fixture Rating
Pole ID	Pole Address	(MA, PT, ORN)	(Watts)
21628	38.4361, -121.4458 on Franklin Blvd.	MA	110
N/A	8801 Franklin Blvd.	MA	110
21624	8814 Franklin Blvd.	MA	110
21622	38.4396, -121.4453 on Franklin Blvd.	MA	110
21620	38.4407, -121.4451 on Franklin Blvd.	MA	110
Total of Proposed and Future Radio Loads: (watts):		1248	
Grand total of Street Lighting and Radio loads: (watts):		1798	

## 5G NR AU (AT1K01) Product Overview


	28GHz	
Integrated AU		
Operating frequency	26.5 ~ 29.5GHz	
IBW/OBW	850MHz/800MHz	
EIRP	60dBm	
Antenna Gain	24dBi	
Tx/Rx	4T4R	
Antenna Elements	1,024	
Beam Scan Range	120H/40V	
Size/Weight	9.57 x 16.81 x 6.89 in (<18.16L) / <15.8Kg (33.07lbs) *	
Input Power	-48VDC/100~240VAC	
Power Consumption	AC Version: 416W, DC Version: 402W (Load 100%, Temp. 55°C, TDD Ratio 4:1)	
Midhaul (gNB-CU Interface)	10G Optic x 2 ports	
Installation	Outdoor Pole/Wall Mount	
Clock Synchronization	GPS and IEEE 1588v2	
Operating Temperature	-40 deg C to +55 deg C with solar load	
Cooling	Natural Convection	

<sup>\*</sup> Without Cover & GPS Port

# 5G NR AU (AT1K01) Product Specifications

Item	AT1K01	
Technology	5G NR	
Operating Frequency	27.5 to 28.35 GHz	
RF Chain	1024 TR/unit	
Antenna Array		
Configuration	1024 AE (4T4R)	
Element	256 AE (16H16V)/path, 1024 AE/unit	
Gain	28 dBi/path	
IBW/OBW	850/800 MHz	
Channel Bandwidth/Capacity	100 MHz	
Max 8CC (50/200/400 MHz will be supported in ES2, SVR19A: 1 00 MHz)		
RF Output Power	EIRP 54dBM/path, 60dBm/unit	
Input Voltage	-48 V DC (-36 to -58 V DC) or 100 to 240 V AC	
Input Current	8.4 A @ -48 V DC	
Input Current	4.3 A @ 100 to 240 V AC	
LED	Total: 1 EA	
LED	Powered, Operational, Fail (3 Status w/different colors)	
Operational Temperature	-40~55°C (with solar load)	
Humidity	TBD	
IP rating	IP65	
EMC	FCC Title 47 CFR Part 15 Subpart B	
Safety	UL 60950 or 62368	
Installation	Pole/Wall/Tower mounting	
Dimension (W × D × H)	9.57 in. (243 mm) × 6.89 in. (175 mm) × 16.81 in. (427 mm) •(@without cov	
	er)	
	9.57 in. (243 mm) × 6.89 in. (175 mm) × 19.4 in. (493 mm) (@with cover &	
	GPS Port)	
Volume	< 18.16 L	
Weight	< 33.07 lb. (15.8 kg)	

# Appearance

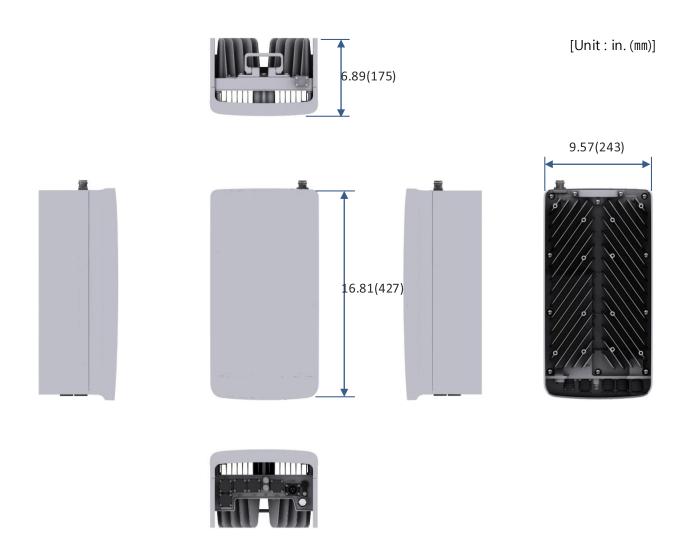

## 28GHz AU(AT1K01-A00) - Label attached location

