

**CITY OF ELK GROVE
SMUD SERVICES REQUEST
FOR TELECOMMUNICATOINS
SERVICE PROVIDER**



Date of Request: 6/19/2020

Approximate Date Service Connection is Needed: Q4 2020

START _____ DISCONNECT _____ TRANSFER OF SERVICE

Telecommunications Service Provider (TSP) Name: Verizon Wireless

TSP Billing Address: PO BOX 21074, Tulsa, OK 74121

Contact Person and Number: DeeAnn Jurach (916) 612-3789

Point of Connection (POC): City Service# (XXXX)

SMUD POC to City Conductor:

1. Descriptive Address: Measurements must be from the street center line and must be listed as x feet, the side of the street, and include north/south and east/west directions. For example: 50 feet of East Street and 10 feet South of J Street.

66' North and 657 West of Bruceville Rd and Elk Grove Blvd

2. California State, Zone 2, NAD83 in Feet: X,Y coordinate of the connection point:

NAD83: 38.409131, -121.419967

CA State, Zone 2: 6727874.394ftUSE 1911348.856ftUSN

3. Attach City Map with SMUD POC to City Conductor with an X or highlight on the map.

(Note: please only submit the drawing with this location. Do not submit all drawing pages.)

See attached map.

City Pole Number: **SLT-8000682**

Location of TSP Devices on City Street lights:

1. Descriptive Address: Measurements must be from the street center line and must be listed as x feet, the side of the street, and include north/south and east/west directions. For example: 50 feet of East Street and 10 feet South of J Street.

64' North and 302' West of Elk Grove Blvd and Bruceville Rd

2. California State, Zone 2, NAD83 in Feet: X,Y coordinate of the connection point:

NAD83: 38.409143, -121.418738

CA State, Zone 2: 6728226.530ftUSE 1911355.476ftUSN

3. Attach City Map with location of TSP devices on City Street light with an X or highlight on the map. (Note: please only submit the drawing with this location. Do not submit all drawing pages.) **See attached map.**

Point of Service (**CITY POS**): SMUD POS: **N/A – direct feed from SMUD POC**

1. Descriptive Address: Measurements must be from the street center line and must be listed as x feet, the side of the street, and include north/south and east/west directions. For example: 50 feet of East Street and 10 feet South of J Street.
2. California State, Zone 2, NAD83 in Feet: X,Y coordinate of the connection point:
3. Attach City Map with SMUD POC to City Conductor with an X or highlight on the map. (Note: please only submit the drawing with this location. Do not submit all drawing pages.) **See attached map.**

Number/Type of Devices: (How many transmitters, antennae, etc.) **3**

Make and Model of Devices: **Samsung AT1K0I 5G NR AU**

Maximum Wattage of each Device: **416**

Small cell attachment equipment specification sheet attached **X**

Note:

This area reserved for SMUD use

ATTACHMENTS (IN THIS ORDER)

1. LOCATION MAP: GOOGLE MAP SHOWING: (Do not change orientation of the map)
 - a. POC (Source that feeds the service pedestal)
 - b. POS (City service pedestal)
2. PE CERTIFICATION: Signed and with seal from Electrical Engineer
3. FIELD VERIFICATION: Small Cell Load Summary sheet(s)
4. EQUIPMENT SPECS: Specific to each SMUD Service Notice Request



SMUD POC

Verizon Installation

SMUD POC
38.409131, -121.419967
6727874.394ftUSE 1911348.856ftUSN
66' North and 657 West of Bruceville Rd
and Elk Grove Blvd

SLT-8000682
38.409143, -121.418738
6728226.530ftUSE 1911355.476ftUSN
64' North and 302' West of Elk Grove Blvd and
Bruceville Rd



240 Stockton Street, 3rd Floor
San Francisco, CA 94108
www.modusllc.com

June 18, 2020

Carrier: Verizon Wireless
2785 Mitchell Drive, Suite 9
Walnut Creek, CA 94598

To Whom It May Concern,

I, Manan Christian PE state that Samsung Distributed 5G Radio/Antenna Unit model #AT1K01 is designed to use a maximum of 416 watts per unit at 120 volts and that the electrical power load presented in this document meets the requirements of the California Electrical Code 2019 , NEC 2017 and National electrical safety code 2017.

Scenario 1 : Three distributed DU-RU Radio/Antenna Units

Unit	W
Distributed DU-RU	416
Distributed DU-RU	416
Distributed DU-RU	416
Total	1248

Scenario 2 : Three distributed DU-RU Radio/Antenna Units

Unit	W
Distributed DU-RU	416
Distributed DU-RU	416
Total	832

Sincerely,



Manan H Christian, P.E. – E.E.
California License: E22864
Expiration Date: 12/31/2020

FIELD WALK DATA COLLECTION FORM




Vendor/Carrier Name:	VERIZON WIRELESS	
City Project Number:		
Site Walk Date & Time:	4/6/2020	
Electrical Plan Sheet Number:	N/A	

Project/Site ID:	CA_ELK GROVE_LAGUNA_040				
Installation Address:	7211 Elk Grove Blvd				
Installation Coordinates:	38.409143, -121.418738				
Node Number:	LAGUNA_040				
Street Light Pole ID:	SLT-8000682				
City Service Address:	N/A				
City Service Number:	POS N/A Meter # N/A				
SMUD Point of Connection Address:	N/A				
SMUD Point of Connection Coordinates:	N/A				
RF Configuration:	3	Radio Load:	416	Future Radio Load:	1248

Circuit Breaker:	N/A									
Voltage:	<input checked="" type="checkbox"/> 120 V <input type="checkbox"/> 277 V <input type="checkbox"/> 480 V									
Number of Existing Loads:	SL-LED:		SL-HPS:		LP-LED:		LP-HPS:			
Other Existing Loads:										

Street Light Poles Requiring Photocell Retrofit			
Street Light Pole ID	Pole Address	Pole Type (MA, PT, ORN)	Fixture Rating (Watts)
8000682	7211 Elk Grove Blvd	MA	110
Total of Proposed and Future Radio Loads: (watts):			1248
Grand total of Street Lighting and Radio loads: (watts):			1358

5G NR AU (AT1K01) Product Overview


	28GHz
Integrated AU	
Operating frequency	26.5 ~ 29.5GHz
IBW/OBW	850MHz/800MHz
EIRP	60dBm
Antenna Gain	24dBi
Tx/Rx	4T4R
Antenna Elements	1,024
Beam Scan Range	120H / 40V
Size/Weight	9.57 x 16.81 x 6.89 in (<18.16L) / <15.8Kg (33.07lbs) *
Input Power	-48VDC / 100 ~ 240VAC
Power Consumption	AC Version: 416W, DC Version: 402W (Load 100%, Temp. 55°C, TDD Ratio 4:1)
Midhaul (gNB-CU Interface)	10G Optic x 2 ports
Installation	Outdoor Pole/Wall Mount
Clock Synchronization	GPS and IEEE 1588v2
Operating Temperature	-40 deg C to +55 deg C with solar load
Cooling	Natural Convection

* Without Cover & GPS Port

5G NR AU (AT1K01) Product Specifications

Item	AT1K01
Technology	5G NR
Operating Frequency	27.5 to 28.35 GHz
RF Chain	1024 TR/unit
Antenna Array	
Configuration	1024 AE (4T4R)
Element	256 AE (16H16V)/path, 1024 AE/unit
Gain	28 dBi/path
IBW/OBW	850/800 MHz
Channel Bandwidth/Capacity	100 MHz
Max 8CC (50/200/400 MHz will be supported in ES2, SVR19A: 100 MHz)	
RF Output Power	EIRP 54dBm/path , 60dBm/unit
Input Voltage	-48 V DC (-36 to -58 V DC) or 100 to 240 V AC
Input Current	8.4 A @ -48 V DC 4.3 A @ 100 to 240 V AC
LED	Total: 1 EA Powered, Operational, Fail (3 Status w/different colors)
Operational Temperature	-40~55°C (with solar load)
Humidity	TBD
IP rating	IP65
EMC	FCC Title 47 CFR Part 15 Subpart B
Safety	UL 60950 or 62368
Installation	Pole/Wall/Tower mounting
Dimension (W × D × H)	· 9.57 in. (243 mm) × 6.89 in. (175 mm) × 16.81 in. (427 mm) • (@without cover) · 9.57 in. (243 mm) × 6.89 in. (175 mm) × 19.4 in. (493 mm) (@with cover & GPS Port)
Volume	< 18.16 L
Weight	< 33.07 lb. (15.8 kg)

Appearance

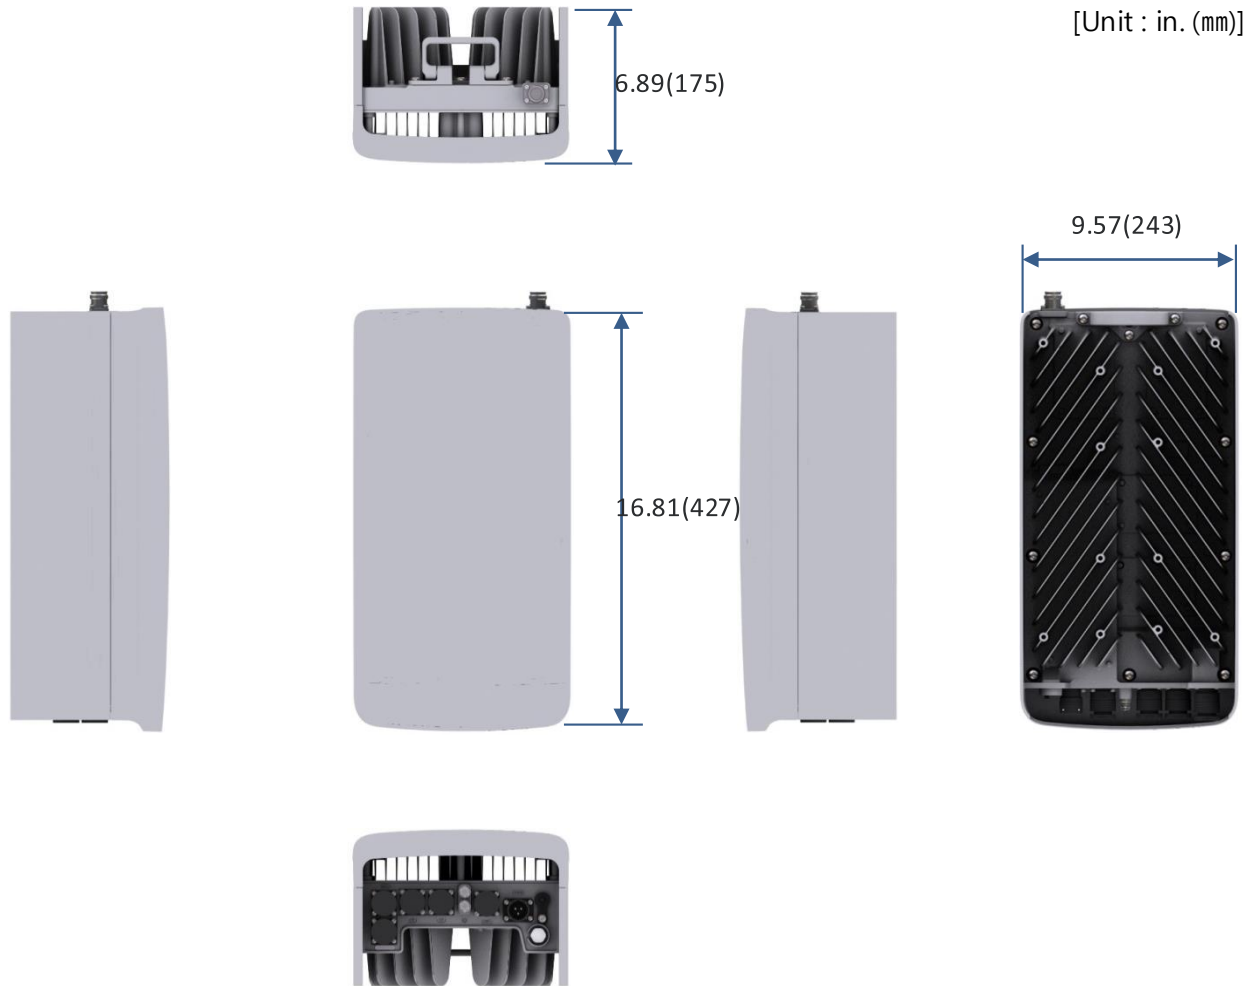

■ 28GHz AU(AT1K01-A00) – Label attached location

